Air Conditioning 275
Alcohol Cooktops..... 265, 266
Barbeques..... 255-258
Diesel Stoves 269-271
Fume Detectors 285, 286
Heaters 266-274
Ice Makers 280
Propane Cylinders..... 284
Propane Hose 284, 285
Propane Regulators 285
Stoves..... 259
Refrigeration 276-283
Stove Pipe 272
Water Heaters 274

Complete Comfort Solutions for Marine

Only Dometic Group, Marine Division has:

- Broadest Selection of Marine HVAC Products
- 24/7 North America Customer Support
- Largest Global Service Network

◀ EnviroComfort R-410A Self-Contained A/C Kit

EnviroComfort Retrofit A/C Kits provide 6K, 10K, and 16K BTUs of cooling and heating. They feature a compact digital control and stainless-steel drain pan and are ideal for replacing outdated air conditioners.

- Add the Installation Kit for new A/C installations
- Add the Dual Duct Kit to treat a second cabin

◀ CR Series Refrigerators

- Up to 3.8 cu. ft. of refrigeration
- Full-width freezer compartment

CF Series Portable Coolers ▲

- AC/DC, up to 3.77 cu. ft. capacity
- Refrigerate or deep freeze to 0°F

CS-NC-15 Cooling Kit ▶

- Easy to install
- Ideal for chest coolers
- Up to 8.8 cu. ft. of refrigeration

◀ Origo Alcohol Stoves

- Single- or double-burner
- Pressure-free alcohol fuel is safe to use

Adler/Barbour ColdMachines ▲

- Air-cooled units and evaporators
- Up to 15 cu. ft. of refrigeration

Portable Ice Maker ▶

- 33 lbs. of ice per day
- Ice is ready in 15 min.
- Easy-to-use LED keypad

Breathe Easy Portable Air Purifier ▼

- Stops odors, reduces VOCs
- Up to 98% effective

www.DometicUSA.com
954-973-2477

Dometic

PREMIUM GRILLS & ACCESSORIES

PROFILE

150

• Gas, LP Gas or Electric (110V) •
• Low profile—easy to store • High-grade stainless steel •
• Ready to use out of the box • Removable grease tray •
• Stay-cool handle • Mountable to your boat •

STOW N' GO

160

• Charcoal, Gas or LP Gas •
• High-grade stainless steel • Thermometer & Igniter available •
• Ready to use out of the box • Removable grease tray •
• Stay-cool handle • Mountable to your boat •

STOW N' GO

316

• Gas, LP Gas or Electric (110V) • Thermometer & Igniter •
• High-grade stainless steel • Warming rack • Lift & Clean™ liner •
• Ready to use out of the box • Removable grease tray •
• Stay-cool handle • Mountable to your boat •

KUUMA PRODUCTS

PREMIUM WATER HEATERS

Marine-quality aluminum alloy case • The water heater of choice for many OEMs • ETL listed to UL 174 • TIG welded

Available in:

5 GALLON

• Front Heat Exchange
• Side Mount
• 120V & 240V

6 GALLON

• Front or Rear Heat Exchange
• Front/Back or Side Mount
• 120V & 240V

11 GALLON

• Front Heat Exchange
• Vertical or Horizontal Mount
• 120V & 240V

20 GALLON

• Front or Rear Heat Exchange
• Front/Back or Side Mount
• 120V & 240V

121 Landmark Drive • Greensboro, NC 27409 • 1.800.334.2004 • www.camco.net • A CAMCO BRAND

CAMCO

KUUMA MARINE BARBECUES

All Kuuma barbecues have highly polished stainless steel exterior construction along with stainless steel parts including burners and grills that ensure years of service while looking great. Sturdy insulated handles allows easy access to the cooking surfaces & the lids locks securely in the closed position for storage. All models feature a removable grease tray for fast & easy clean up. A wide offering of sizes, features, mounting options and accessories mean there is a Kuuma barbecue for all applications. The regulators are designed to accept disposable propane bottles, or can be connected to a large tank with an optional hose. Flavour plates are included to spread heat evenly. Mounts and accessories are sold separately.

STOW & GO 125 COMPACT MARINE BARBECUE

- Stainless-steel construction
- Heat output of 9,000 BTUs
- 125 sq. in. cooking surface
- Stay cool handle
- Integral foldaway legs
- Removable grease tray
- No assembly required
- 1 year manufacturer's warranty

CAM58140 125 Propane

STOW & GO 160 MARINE BARBECUE

- Stainless steel construction
- Heat output of 13,000 BTUs
- 160 sq. in. cooking surface
- Double locking lid
- Stay cool handle
- Integral fold away legs
- Removable grease tray

CAM58130 160 Propane

CAM58131 160 Deluxe Propane (w/ Igniter & thermometer)

STOW & GO 216 MARINE BARBECUE

- Stainless-steel construction
- Heat output of 13,000 BTUs
- 180 sq. in. cooking surface
- Removable Lift & Clean Liner
- Standard igniter & thermometer
- Stay cool handle
- Locking lid
- Integral foldaway legs
- Removable grease tray

CAM58150 216 Propane

Removable Easy Clean Liner

KUUMA PRODUCTS

STOW & GO 316 MARINE BARBECUE

- Stainless-steel construction
- Heat output of 13,000 BTUs
- 205 sq. in. cooking surface
- Standard igniter & thermometer
- Warming rack included
- Stay cool handle
- Locking lid
- Integral foldaway legs
- Removable grease tray

CAM58171 316 Propane

STOW AND GO BARBECUE ACCESSORIES

CAM58183 Universal rail mount (KUU83650)
CAM58182 Outboard rail Mount (KUU83635)
CAM58180 Rod holder mount (KUU83754)
CAM58184 Pedestal mount 24" (KUU83769)
CAM58185 Bulkhead/RV mount (KUU83746)
CAM58260 Pedestal floor base only (KUU83998)
CAM58181 Rail mount (KUU83759)
CAM58200 Cast iron griddle (KUU83751)
CAM58231 Food tray for Stow And Go 125 & 160 (KUU83245)
CAM58311 Black cover for Stow And Go 125 (KUU83110)
CAM58310 Black cover for Stow And Go 160 (KUU83111)
CAM58300 Black tote bag for Stow And Go 125 & 160 (KUU83176)
CAM58271 Low pressure valve & orfice for Stow & go 125 compact
CAM58270 Low pressure valve & orfice for Stow & go 160

For propane hoses see the propane accessories page in this section

BARBECUE PARTS FOR CURRENT MODELS

Current Models	Burner	Grill	Heat Plate	Regulator	Drip Tray
Stow & Go 125	CAM58210	CAM58223	CAM58253	CAM58275	CAM58241
Stow & Go 160	CAM58211	CAM58221	CAM58252**	CAM58275	CAM58244*
Older Models	**Burner**	**Grill**	**Heat Plate**	**Regulator**	**Drip Tray**
Profile 150 LPG	CAM58211	CAM58222	CAM58251	CAM58275	CAM58240
Profile 150 120V		CAM58222	CAM58251		CAM58240
Profile 216 LPG	CAM58211	CAM58224		CAM58275	CAM58245
Profile 216 120V		CAM58224			CAM58245
Stow & Go 225	CAM58212		CAM58256	CAM58275	
Sea Grill 180	CAM58254			CAM58275	

*** For models built before 2008 use CAM58242. For models built in 2008 use CAM58243.**
**** For models built before 2008 use CAM58245.**

VERSA 50 MARINE BARBECUE

The Versa 50 from Jackson Grills is changing the marine grill industry by offering superior quality and unparalleled performance. The construction of the Versa 50 is unrivaled, consisting of heavy gauge 304 grade stainless steel, including the burner system which offers 12,500BTU heat output. Can't find a match or lighter, don't sweat it, the Versa 50 is equipped with a reliable battery powered electronic ignition system.

- Roll clean grill surface (grill bars roll for easy cleaning and food positioning)
- Variable width grill bars
- Heat distributing flame diffusing system
- Folding legs for tabletop use
- Optional rail mount
- 100% 304 stainless steel construction
- Battery powered electronic ignition
- 155 square inch cooking surface
- Integrated grease management system
- 12,500BTU heat output

JPG50 Versa 50 Barbecue (Propane)

VERSA 100M MARINE BARBECUE

The Versa 100M features 304 Marine Grade stainless steel construction including all stainless fasteners. This grill combines a generous size cooking surface along with the same quality features we pack into our full size home based models such as electronic ignition system and proper grease management system. You should expect the ultimate in performance and high attention to quality detail in this superior product. There is also an optional valve system that allows for Natural Gas conversion, a direct hook-up to a large LP cylinder (JPGLPHOSE-5 needed) or direct hook-up to a pre regulated pressure system.

- 304 Stainless steel main burner
- 304 Stainless steel body construction
- Single 12,000 BTU burner
- 220 square inch cooking surface
- Regulator assembly (connects to 1LB cylinder)
- Fold away leg system
- Designed to easily mount to boat rail (option sold separately)
- Stainless steel hardware
- Commercial quality construction
- Electronic ignition
- Integrated grease management system
- Full welded design
- Roll clean cooking surface with VGS (Variable Grilling Surface)

JPG100M Versa 100M Barbecue (Propane)

VERSA SERIES MARINE BARBECUE ACCESSORIES

JPG50COVER	Cover for Versa 50
JPG75TTCOVER	Cover for Versa 100M
JPGRM	Rail Mount for Versa 50 & 100M
JPGVALVE	Low Pressure Valve for Versa 50 & 100M
JPGLPHOSE-2	Propane Hose with Regulator, 2'
JPGLPHOSE-5	Propane Hose with Regulator, 5'

dickinson

SMALL SEA-B-QUE PROPANE BARBECUE

This sturdy octagonal barbecue is made from brushed stainless steel. Handles attached to the rollaway top allow for effortless opening and closing even when the barbeque is hot. It comes complete with feet, which serve as a dockstand, other mounts sold separately. The cooking surface is 16" x 9-1/4" and the unit is 12-3/8"H x 10"D x 24"W. 10000 BTU.

00-SBQS

dickinson

LARGE SEA-B-QUE PROPANE BARBECUE

This sturdy octagonal barbecue is made from brushed stainless steel. Handles attached to the rollaway top allow for effortless opening and closing even when the barbeque is hot. It comes complete with feet, a Piezo lighter and a removable drip tray, other mounts sold separately. The cooking surface is 19-3/4" x 11" and the unit is 14-1/2"H x 12"D x 28"W. 11000 BTU.

00-SBQL

dickinson

SEA-B-QUE ROUND PROPANE BARBEQUE

- Removable non-stick porcelain grill sections
- Thermally insulated silicon handles
- Roll away hood
- 18"W x 16"D x 14-1/4"H
- 14-3/8" Cooking surface
- 7000 BTU
- Piezo ignition

00-SBQR

dickinson

MOUNTS & ACCESSORIES

15-150A	Vertical/horizontal rail mount for 1/2" to 1-1/8" square or round rail
15-150B	Pedestal mount
15-150P	"Scotty Type" mount
15-150F	Mount for flush rod holders
15-187	Taft rail mount kit
15-060	Burner for 00-SBQL
15-061	Burner for 00-SBQS
15-080	Drip tray for 00-SBQS & 00-SBQL
15-110	Gas regulator with control knob
15-182	Small stainless grill sections - requires 4
15-182-P	Small porcelain grill sections - requires 4
15-183	Large stainless grill sections - requires 4
15-183-P	Large porcelain grill sections - requires 4
15-185	Small all weather cover
15-184	Large all weather cover

For propane hoses see the propane accessories page in this section

dickinson

FOOD & DRINK TRAY

Stainless tray with plastic cutting board. Clips onto the front of your Barbeque to provide a convenient tray that you can prepare food on.

15-180 Small
15-181 Large

dickinson

AUSSIE GRIDDLE

Use the griddle pan to make pancakes, cookies, hamburgers, eggs or chopped veggies. The griddle really adds versatility to your marine grill! 14 Gauge 304 stainless steel.

15-200 For 00-SBQS
15-201 For 00-SBQL

Bolton

HEAVY DUTY STAINLESS BARBECUE STAND

Mounts to swim grid. Can swing out of the way or over the water. Easy to remove and stow. Post inserts into flush mount socket.

BOLBT0016 Heavy Duty

SEADOG LINE

TOASTER

Stainless steel. Place over open flame and the S.S. mesh will spread the heat to make perfect toast. Toasts 2 slices of bread at a time. Removable handle.

590400

dickinson

BARBEQUE CLEANING KIT

Make your BBQ shine like new. For Stainless steel BBQ's with grained finish (brushed).

Not for polished finishes.

15-555

Jackson Grills

PATIO FIRE FIREPIT

There are few things better than a nice summer evening with friends and family around a campfire. During dry weather however, some restrictions are often in place preventing campfires that use firewood. What do you do then? Gather everyone around a bug-zapper or flashlight? Save yourself the disappointment and embarrassment with a Jackson Grills Patio Fire!

In addition to the light warmth, and cozy comfort of a regular campfire; you also get total convenience. The Jackson Patio Fire features 50,000 BTU's and is simple to light and operate. While camping or relaxing on your back deck, the Jackson Patio Fire provides ample heat and ambiance for any occasion. The patented design allows for superior portable usage and Jackson exclusive flame performance. Comes with a weatherproof lid, wind guard, 5 foot hose, log set, regulator and valve. Operates up to 20 hours on a 20-lb. tank (tank sold separately). Comes standard with fibre log set. Optional fire glass available seperately.

JFP-LP Firepit
JFP-BK Optional decorative glass for firepit, Black
JFP-BL Optional decorative glass for firepit, Blue
JFP-WH Optional decorative glass for firepit, White

FORESPAR
MARINE PRODUCTS THAT PERFORM

HOT SPOT MINI GALLEY

Portable multi-use galley stove with coffee pot

- Gimballed stainless steel basket cradles pots securely
- Extra hot 5000 BTU adjustable flame cooks or boils quickly
- Up to 8 hours of burn time from one tank
- Versatile below deck, rail or table-top use
- Great on any boat - power or sail

FSP150000
FSP150007 Spare mount

Below Deck

At The Dock


Picnic Table

dickinson

DROP-IN MODEL PROPANE COOKER

- Two powerful burners: one 11,000 BTU and one 7,000 BTU
- Heavy duty stainless steel construction
- Safe push and turn electronic ignition
- Easily installed with under-counter brackets
- Fits standard cut-outs
- Shallow 4.25" height
- Safety gas valve
- Pot holders, Cutting board & WOK holder ring
- Large "triple ring" professional burner

Overall dimensions	23"W x 14"D x 4.25"	
Cut-out dimensions	21.5"W x 12.5"D x 4.25"H	
Weight	20 lbs	
Burners	11,000 BTU	Triple ring
	7,000 BTU	Semi-rapid

00-2BP
23-020 Pot holder

2-BURNER GAS COOKTOP

With a low profile, compact contemporary design this 2 Burner cooktop has both an 8500 BTU Rapid burner and a 6000 BTU Semi-Rapid burner. Additional features include, polished stainless steel finish, thermocouple protection and electronic spark ignition.

ENO43234

3-BURNER GAS COOKTOP

This 3-burner cooktop has a low profile design and provides a large cooking surface. With three different burner outputs; 8500 BTU, 6000, BTU and 3400 BTU this unit offers maximum cooking control and flexibility. Additional features include, polished stainless steel finish, thermocouple protection and electronic spark ignition.

ENO43334

2-BURNER GIMBAL GAS COOKTOP

A compact high performance gimbaled unit ideal for small sailing vessels and offshore craft. This unit features both an 8500 BTU Rapid burner and a 6000 BTU Semi-Rapid burner, polished stainless steel finish, thermocouple protection and electronic spark ignition. Gimbal kit and (1) pot holder set is included standard.

ENO46238

	ENO43234	ENO43334	ENO46238
Cutout Width	17-3/4"	17-3/4"	18-1/2"
Cutout Depth	12-5/8"	14-5/8"	15-1/2"
Cutout Height	1.5"	1.5"	9-3/4"
Width	18-3/8"	18-3/8"	19-5/8"
Depth	13-1/8"	15-1/8"	13-1/2"
Height	4"	4"	9-3/4"
Weight	9lbs	11lbs	11lbs

The Difference is in The Details

FORCE10

FORCE 10 TRIM KITS TO CONVERT GIMBALED STOVES TO BUILT-IN

For installations that don't require gimbaling, trim kits are available for built-in applications. The trim is constructed of polished 304 stainless steel and provides a sleek finished look and a solid mounting platform. The trim kit attaches easily and securely to pre-existing mounting hardware on the Range. Trim Kits are available for all standard height units.

Trim Kit for 3 and 4 Burner models – Part # 70034 For use with model # 63351, 63356, 63451

Trim Kit for 2 Burner models – Part # 70002 For use with model # 63251, 63256

FOR70034* Trim kit for 3 & 4 Burner Models

FOR70002* Trim kit for 2 Burner Models

Cut-out dimensions change with trim kit installation, go to **www.force10.com** for details







FORCE10

FORCE 10 2-BURNER GIMBALED RANGES

Available in (6) sizes to fit most OEM galley cutouts. Available Trim Kit allows for fix mounted built in installation. All units are manufactured to ABYC standards, and constructed of thick gauge 304 polished stainless steel and marine grade components to withstand the harsh marine environment. All Ranges include one Rapid (9200 BTU) top burner and one Auxiliary (3400 BTU) simmer burner and a thermostatically controlled oven with a broiler. Standard safety features include; thermocouple protection on each burner, gimbal locking device, a secondary door lock and sea rail with pot holders. The 1.5 Volt push button electronic spark ignition, slide away oven door with viewing window and removable top grate provide convenience for operation and maintenance. All units operate from either Propane or Butane gas at 28-30 mbar pressure, include a (2) year warranty and have CE and AGA certification.

FORCE10 COOKING WITHOUT COMPROMISE	American Standard	American Compact	Euro Standard	Euro Compact	Euro Sub-Compact	XM
	FOR63251	FOR63253	FOR63256	FOR63258	FOR63254	FOR63269
A	22"	22"	20-3/8"	20-3/8"	18-1/2"	19-1/2"
B	21-1/2"	20-1/2"	21-1/2"	20-1/2"	20-1/2"	22-1/2"
C	23"	21"	23"	21"	21"	22"
D	21-5/8"	21-5/8	20"	20"	18-1/2"	19-1/8"
E	21-1/2"	19-1/4"	21-1/2"	19-1/4"	19-1/4"	20"
F	17-1/2"	17-1/2"	17-1/2"	17-1/2"	17-1/2"	19-3/4"
Weight	70lbs	66lbs	66lbs	63lbs	60lbs	66lbs
Oven Vol.	25L	19L	23L	17L	14L	20L







FORCE10

FORCE 10 3-BURNER GIMBALED RANGES

Available in (5) sizes to fit most OEM galley cutouts. Available Trim Kit allows for fix mounted built-in installation. All units are manufactured to ABYC standards, and constructed of thick gauge 304 polished stainless steel and marine grade components to withstand the harsh marine environment. All Ranges include one Rapid (9200 BTU) top burner and two Auxiliary (3400 BTU) simmer burners and a thermostatically controlled oven with a broiler. Standard safety features include; thermocouple protection on each burner, gimbal locking device, a secondary door lock and sea rail with pot holders. The 1.5 Volt push button electronic spark ignition, slide away oven door with viewing window and removable top grate provide convenience for operation and maintenance. All units operate from either Propane or Butane gas at 28-30 mbar pressure, include a (2) year warranty and have CE and AGA certification.

FORCE10 COOKING WITHOUT COMPROMISE	American Standard	American Compact	Euro Standard	Euro Compact	Euro Sub-Compact
	FOR63351	FOR63353	FOR63356	FOR63358	FOR63354
A	22"	22"	20-3/8"	20-3/8"	20-3/8"
B	22-3/4"	21-1/2"	22-3/4"	21-1/2"	21"
C	23-3/4"	21-1/2"	23-3/4"	21-1/2"	20"
D	21-5/8"	21-5/8"	20"	20"	20"
E	21-1/2"	19-1/4"	21-1/2"	19-1/4"	17-3/4"
F	22"	22"	22"	22"	20-3/4"
Weight	81lbs	78lbs	78lbs	71lbs	67lbs
Oven Vol.	30L	19L	26L	17L	13L

FORCE 10 4-BURNER GIMBALED RANGES

Available in (2) sizes. Available Trim Kit allows for fix mounted built-in installation. All units are manufactured to ABYC standards and constructed of thick gauge 304 polished stainless steel and marine grade components to withstand the harsh marine environment. Both models include one Rapid (9200 BTU) top burner and three Auxiliary (3400 BTU) simmer burners and a thermostatically controlled oven with a broiler. Standard safety features include; thermocouple protection on each burner, gimbal locking device, a secondary door lock and sea rail with pot holders. The 1.5 Volt push button electronic spark ignition, slide away oven door with viewing window and removable top grate provide convenience for operation and maintenance. Both models can operate from either Propane or Butane gas at 28-30 mbar pressure, and include a (2) year warranty and have CE and AGA certification.

FORCE10	American Standard	American Compact
	FOR63451	FOR63453
A	22"	22"
B	22-3/4	21-1/2
C	23-3/4	21-1/2
D	21-5/8	21-5/8
E	21-1/4	19-1/4
F	22"	22
Weight	81lbs	75lbs
Oven Vol.	30L	19L







FORCE 10 PROFESSIONAL 5-BURNER GIMBALED RANGES

Force 10 Professional Series 5-Burner Gimbaled Range is designed for large vessels and crewed yachts. This unit is manufactured to ABYC standards, and constructed of thick gauge 304 polished stainless steel and marine grade components to withstand the harsh marine environment. There are four Rapid (9200 BTU) top burners and one central (3400 BTU) simmer burner. A large capacity high output thermostatically controlled oven with a broiler offers extra space to cook larger dishes. Standard safety features include; thermocouple protection on each burner, gimbal locking device, a secondary door lock and pot holders. The 1.5 Volt push button electronic spark ignition, slide away oven door with viewing window and removable top grate provide convenience for operation and maintenance. Operation is from either Propane or Butane gas at 28-30 mbar pressure. This unit has a (2) year warranty. Trim kit included for built-in installation.

FORCE10	Professional Series
	FOR62551
A	25-3/8"
B	21-5/8"
C	24-5/8"
D	25"
E	22-3/4"
F	22-3/8"
Weight	112lbs
Oven Vol.	36L







GIMBALLED OVEN/STOVE COMBOS

The choice of European boat builders for years, these fine products have come to Canada. Stainless steel construction for years of service. Electronic ignition and thermocoupled burners for safety. Gimbals, potholders and stove tops surrounded on three sides by a raised frame ensure the meal stays on the stove. The 6100 BTU enamel coated oven is easy to keep clean.
ENO14234: Outside dimensions: 19.1"H x 20.1"W x 17.3"D;
cutout dimensions: 20.6"H x 20.9"W x 21.6"D
ENO18634: Outside dimensions: 18.85"H x 20.1"W x 17.3"D;
cutout dimensions: 20.6"H x 20.9"W x 21.6"D

ENO14234 2-Burner, 6000/8500 BTU
ENO18634 3-Burner, 3400/6000/8500 BTU

BUILT IN WALL OVEN

This modern looking stainless steel inside and out oven offers yacht style. It is built to be inserted into a wall/cabinet. The 5100 BTU main oven burner and 4400 BTU broiler offer a great deal of versatility. Electronic ignition and thermocoupled burners for safety. Oven is thermostatically controlled for home like convenience.
Outside dimensions: 21.5"H x 17.6"W x 17.2"D;
cutout dimensions: 16.4"H x 20.5"W x 17.7"D

ENO87437

dickinson
THE CARIBBEAN 2 BURNER GAS GALLEY RANGE

This stove/oven is the perfect unit for your boat. It features 2 efficient 11000 & 7000 BTU burners, with safety "flame-out" protection. Also features a 35L thermostatically controlled oven, complete with broiler. Handmade in Canada, using 100% stainless steel, backed by the Dickinson name. 20.375"W x 14.75"D x 21.75"H. Oven dimensions are 18"W x 12"D x 7"H.

- 100% stainless steel
- 11000 & 7000 BTU burner
- Thermostatically controlled oven, complete with broiler
- Pot holders
- Removable cutting board
- Gimballed, or built-in installation option available

00-CAR-2B
26-003 Gimbal mount kit
26-000 Built in mount kit

dickinson
THE MEDITERRANEAN 3 BURNER GAS GALLEY RANGE

This stove/oven features 2 efficient 7000 BTU burners and one larger 11000 BTU burner, all equipped with safety "flame-out" protection. It also features a 35L thermostatically controlled oven, complete with broiler. Handmade in Canada, using 100% stainless steel, backed by the Dickinson name. 20.375"W x 20.25"D x 21.75"H. Oven dimensions are 18"W x 12"D x 7"H.

- 100% stainless steel
- 11000 and dual 7000 BTU burners
- Thermostatically controlled oven, complete with broiler
- Pot holders
- Removable cutting board
- Gimballed or built-in installation option available

00-MED-3B
26-003 Gimbal mount kit
26-001 Built in mount kit

FORCE10

CERAMIC-GLASS ELECTRIC COOKTOPS

Ceramic glass countertops with high-speed efficient radiant 1000W burners have low profile elegance and are a breeze to clean. All models available in 120V and 240V.

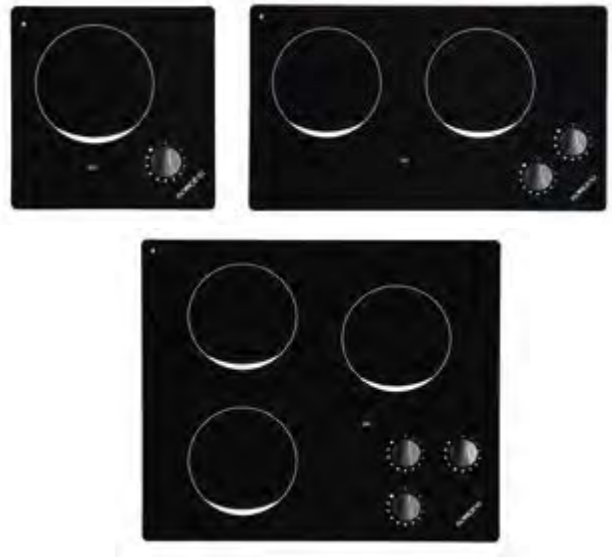

FORCE10	1-Burner	2-Burner	3-Burner
	FOR75120	FOR75220	FOR75320
Width	12"	21"	21"
Depth	12"	12"	18"
Height	3-3/4"	3-3/4"	3-3/4"
Cutout Width	10-5/8"	20"	20"
Cutout Depth	10-5/8"	10-5/8"	16-3/4"
Cutout Height	8"	8"	8"

FORCE10

ELECTRIC GALLEY RANGES

The 3 burner Built-in ranges features (3) top burners, an oven and broiler. Available with either ceramic glass or coil style top elements. Features include a slide away, space saving door and an oven light. The coil top model has a fold down top with integrated cutting board. Both models are also available in 240 Volt.

FORCE10	3-Burner Coil Element Top	3-Burner Ceramic Glass Top
120V	FOR75301	FOR75331
240V	FOR75302	FOR75332
Width	21-1/2"	21-1/2"
Depth	19-5/8"	19-5/8"
Height	22-1/4"	22-1/4"
Cutout Width	20-1/2"	20-1/2"
Cutout Depth	19-1/4"	19-1/4"
Cutout Height	21-5/8"	21-5/8"
Weight	78lbs	86lbs

ORIGO

6000 FREE-STANDING ALCOHOL OVEN / 2-BURNER STOVE

The Dometic ORIGO 6000 is a complete cooking station featuring an oven plus double-burner marine hob. The oven door has a large window made from toughened glass. The heat of the oven is not transferred to the outer surface – an important safety feature while at sea. The oven has an integrated temperature display. Gimbals included for gimbal mounting.

Dimensions: 18-5/15"W x 22-1/8"H x 13-3/16"D

Dimensions incl. gimbals: 20-1/16"W x 22-1/8"H x 13-3/16"D

9581450-99

Dometic

ALCOHOL STOVES

On a boat, the demands on a stove are great. It's essential that it works all the time, but the more parts and the more complicated the design, the greater the risk of malfunction. Dometic Origo stoves are reliable, easy to use, and work completely without pressure. A boat stove should also be suitable for the situation in which it is used. Strong and stable pot holders that can be adjusted easily are important safety and convenience features. High output is another essential feature. All the Dometic Origo denatured alcohol stoves have a maximum heating output of 2000W (7000 BTU) per burner. Each burner is fully adjustable, with a burning time of approximately 4.5 hours at maximum power.

ALCOHOL/ELECTRIC BUILT-IN STOVES

The 2500E/2500GL are built-in stoves with wooden cutting boards or glass lids. Powered by alcohol or 120VAC, producing 7000 BTU (2000watts).

Dometic	Origo 2500 1-Burner
With Wood Lid	9581418-99
With Glass Lid	9581419-99
Width	15-9/16"
Depth	14-13/16"
Height	5-15/16"
Cutout Width	13-9/16"
Cutout Depth	12-13-/16"
Cutout Height	5-1/2"

BUILT-IN ALCOHOL STOVES WITH ELECTRIC IGNITION

The A100/A200 are built-in stoves with glass lids and 12V ignitors. Powered by alcohol, producing 7000 BTU

Dometic	Origo A100 1-Burner	Origo A200 2-Burner
	958147001	958147011
Width	10-5/8"	19-11/16"
Depth	14-3/8"	14-3/8"
Height	6-5/16"	6-5/16"
Cutout Width	10-1/16"	19-1/8"
Cutout Depth	13-3/8"	13-3/8"
Cutout Height	5-15/16"	5-15/16"

BUILT-IN ALCOHOL STOVES

The 2000/4100 are built-in stoves with wooden cutting boards as lids. Powered by alcohol, producing 7000 BTU

Dometic	Origo 2000 1-Burner	Origo 4100 2-Burner
	9581409-99	9581415-99
Width	15-9/16"	24-1/2"
Depth	14-13/16"	14-13/16"
Height	5-15/16"	5-15/16"
Cutout Width	13-9/16"	22-5/8"
Cutout Depth	12-13-/16"	13-13/16"
Cutout Height	5-1/2"	5-1/2"

COUNTER TOP ALCOHOL STOVES

The 1500/3000 are free standing stoves that can be gimballed (brackets optional) Powered by alcohol, producing 7000 BTU

Dometic	Origo 1500 1-Burner	Origo 3000 2-Burner
	9581401-99	9581405-99
Width	9-5/16"	18-1/4"
Depth	10-5/16"	10-5/16"
Height	5-3/8"	5-3/8"
Gimbal Cutout Width	11-1/8"	20-1/16"
Gimbal Cutout Depth	10-5/16"	10-5/16"
Gimbal Cutout Height	9"	9"

STOVE PARTS & ACCESSORIES

3880162-00 Flame spreader
3880036-00 Rubber gasket for fuel reservoir
3880009-80 Replacement fuel container
3880271-81 Slide control for 2000/4100
9581482-01 Gimbal set for 1500/3000
9581480-01 Pot holders
9581481-01 Pot holders with mounting rail

CookMate™

NON-PRESSURIZED ALCOHOL STOVES

- Safe-Flame™ Non Pressurized Canister System
- Non Pressurized Canister System - NO Hoses, NO pumping, NO pre-heating
- Environmentally Friendly Fuel – We recommend grain based alcohol
- Large Capacity Fuel Canister – 1.2 liters (1 ¼ Quart) of Alcohol
- 6800 BTU of heat – Boils 1 quart of water in 8 minutes
- Stoves are constructed of stainless steel

CookMate™ Non-Pressurized Alcohol Stoves

CookMate™

1600 SINGLE BURNER PORTABLE STOVE

Dimensions 5 3/8" H x 9 5/16" W x 10 5/16" D.
Weight 7 lbs 5 oz.

CKM1600

CKMG1605 Optional gimal mount kit

CookMate™

3100 DOUBLE BURNER PORTABLE STOVE

Dimensions – 5 3/8" H x 18 5/16"W x 10 5/16" D
Weight – 14 Lbs.

CKM3100

CKMG1605 Optional gimal mount kit

CookMate™

2100 RECESSED SINGLE BURNER ALCOHOL STOVE

- Cool-Touch wheel control for alcohol burner
- Internal safety heat-shield protection for alcohol flame control
- Custom Bamboo Cutting Board – Long lasting
- Dimensions 6 3/16" H x 15 3/16" W x 14 5/8"D
- Cut-Out Dimensions – 13 5/8 W x 12 13/16" L
- Weight – 14 Lbs

CKM2100

CookMate™

4200 RECESSED DOUBLE BURNER ALCOHOL STOVE

- Cool-Touch wheel control for alcohol burner
- Internal safety heat-shield protection for alcohol flame control
- Custom Bamboo Cutting Board – Long lasting
- Dimensions 5 7/8"" H x 22 7/16" W x 14 3/16"D
- Cut-Out Dimensions – 20 1/2" W x 12 3/16" L
- Weight – 21 Lbs

CKM4200

CookMate™

STOVE PARTS & ACCESSORIES

CKMG1605	Gimal mount kit for 1600/3100
CKMP1603	Pot holder set for 1600/3100
CKMP2101	Pot holder set for 2100/4200
CKMC1010	Reservoir gasket 2-pack
CKMC1000	Fuel canister (all models)
CKMC1070	Flame diffuser (all models)

HeatMate™

5200 PORTABLE ALCOHOL HEATER/STOVE

- Doubles as stove – just remove the lid
- Carrying strap – for easy transport
- 5200 BTU of heat – Boils 1 quart of water in 9 minutes
- Aluminum Construction – Long lasting with continual use
- Dimensions – 11 3/4" H x 11 1/2" W
- Weight – 5 lbs. 3 ozs.

CKM5200

ORIGO Dometic

HEATPAL PORTABLE ALCOHOL HEATER/STOVE

Need some extra heat in your boat? The Origo HeatPal is a small, light and highly-efficient heater for fast additional heat onboard. With the lid removed, it can be used as a stove.
11-1/4"W x 5-15/16"-11-1/4"H.

9581442-99

3880009-81 Replacement fuel container

NEWPORT BULKHEAD MOUNT DIESEL HEATER

Ideal for boats 30/36 ft. Small, compact and bulkhead mounted. An attractive, economical diesel burning heater that provides comfortable, dry heat. Manufactured in stainless steel with decorative valve cover. 3" diameter chimney accessories required.

	00-NEW
Width	10.5 in/26.67 cm
Depth	10.75 in/27.31 cm
Height	19.5 in/49./53 cm
Weight	22 lbs/10 kg
Flue Size	3 in/7.62 cm
Fuel	Diesel #2, #1 or Kerosene
Fuel Consumption / 24hr	1.29 gal Low, 3.20 gal High
Assist Fan	12v Standard (24v or 32v Optional)
Heat Output	Low 6500 BTU, High 16250 BTU
Burner	6" Stainless Steel "Airflow"

dickinson MARINE

ALASKA FLOOR MOUNTED DIESEL HEATER

For boats 30ft-36ft. Small, compact, attractive, economical diesel burning fireplace that produces a cozy, comfortable dry heat. Manufactured in stainless steel. 3" diameter chimney accessories required.

	00-ALA
Width	8.75 in/22.23 cm
Depth	10 in/25.40 cm
Height	21 in/53.34 cm (inc. legs)
Weight	20.5 lbs/9.32 kg
Flue Size	3 in/7.62 cm
Fuel	Diesel #2, #1 or Kerosene
Fuel Consumption / 24hr	1.29 gal Low, 3.20 gal High
Assist Fan	12v Standard (24v or 32v Optional)
Heat Output	Low 6500 BTU, High 16250 BTU
Burner	6" Stainless Steel "Airflow"

dickinson MARINE

ANTARCTIC FLOOR MOUNTED DIESEL HEATER

For boats 36ft - 40ft. Size of heater produces greater heat output than the smaller heaters although fuel consumption is the same. Dry comfortable heat and large flame viewing window. Manufactured in stainless steel. 3" diameter chimney accessories required.

	00-ANT
Width	13 in/33.02 cm (diam)
Height	25 in/63.49 cm (inc. legs)
Weight	29 lbs/13.18 kg
Flue Size	3 in/7.62 cm
Fuel	Diesel #2, #1 or Kerosene
Fuel Consumption / 24hr	1.29 gal Low, 3.20 gal High
Assist Fan	12v Standard (24v or 32v Optional)
Heat Output	Low 6500 BTU, High 16250 BTU
Burner	6" Stainless Steel "Airflow"

dickinson MARINE

LOFOTEN FLOOR MOUNTED DIESEL HEATER

For boats 36ft-40ft. Similar to the Antarctic in performance but with a larger top area, rectangular shape and a cast-iron lid providing a top cooking surface. Manufactured in stainless steel. 4" diameter chimney accessories required.

	00-LOF
Width	10.5 in/26.67 cm
Depth	17 in/43.18 cm
Height	17 in/43.18 cm
Weight	25 lbs/7.25 kg
Flue Size	4 in/10.16 cm
Fuel	Diesel #2, #1 or Kerosene
Fuel Consumption / 24hr	1.29 gal Low, 3.20 gal High
Assist Fan	12v Standard (24v or 32v Optional)
Heat Output	Low 6500 BTU, High 16250 BTU
Burner	6" Stainless Steel "Airflow"

dickinson MARINE

SIGMAR DIESEL HEATERS

Sigmar diesel heaters are attractive heaters that provide great heat output due to their radiant tops and heat shrouds. They are great for use in small boats or to heat a section of a larger boat. The natural draft, vaporizing oil burner system allows them to be used with no electricity with the right installation.

Sig Marine

SIGMAR 100 BULKHEAD MOUNT DIESEL HEATER

The Sig Marine 100 is the smallest bulkhead mount diesel cabin heater made. Suggested boat size: Power: 22-27', Sail: 22-32'. Stainless steel construction.

	SIG10100
Height:	13-3/8"
Width:	8"
Depth:	9.5"
Exhaust Pipe:	3"
Air intake:	3"(optional)
Fuel Consumption Gallon/24 Hr:	High 2.3 Low 0.95
Max. BTU:	10,000

SIGMAR 170 BULKHEAD MOUNT DIESEL HEATER

The Sig Marine 170 is a larger version of the Sig-120. The larger size and burner gives it more heat output. Suggested boat size: Power: 22-40', Sail: 22-45'. Stainless steel construction.

	SIG10170
Height:	20-1/2"
Width:	9.5"
Depth:	9.5"
Exhaust Pipe:	4"
Air intake:	3" (optional)
Fuel Consumption Gallon/24 Hr:	High 3 Low 1.14
Max. BTU:	17,000

SIGMAR 120 BULKHEAD MOUNT DIESEL HEATER

The Sig Marine 120 is a larger version of the Sig-100. The larger size gives it more heat output with the same fuel consumption. Suggested boat size: Power: 22-30', Sail: 22-40'. Stainless steel construction.

	SIG10120
Height:	19"
Width:	8"
Depth:	9.5"
Exhaust Pipe:	3"
Air intake:	3" (optional)
Fuel Consumption Gallon/24 Hr:	High 2.3 Low 0.95
Max. BTU:	12,000

SIGMAR 180 FLOOR MOUNT DIESEL HEATER

The Sig Marine 180 is a floor standing heater. Suggested boat size: Power: 22-40', Sail: 22-45'. Stainless steel construction.

	SIG10180
Height:	24"
Diameter:	10"
Exhaust Pipe:	4"
Air intake:	3" (optional)
Fuel Consumption Gallon/24 Hr:	High 3 Low 1.14
Max. BTU:	18,000

dickinson

GRAVITY FEED STAINLESS DIESEL TANKS

Can be mounted vertically or horizontally.
All fittings provided.

24-001 2 Gallon 8.5" x 8.5" x 15.75"
24-002 5 Gallon 10.25" x10.25" x 18.5"

Sig Marine

COZY CABIN PROPANE HEATER

Bulkhead mounted, 6000 BTU dry radiant heat propane heater. A deck cap is included, with required 1" flue pipe sold separately. No standing pilot light. Piezo spark ignition & thermocouple protection ensures complete safety. If the oxygen content of the cabin drops below 95% of normal, the oxygen depletion system shuts the unit down. Fuel consumption: 3.5 lbs/hr. 7.5"W x 7"D x 16.5"H

SIG10000 propane/butane
SIG10400 replacement base burner complete

dickinson

NEWPORT PROPANE FIREPLACES

The combustion process is completely isolated from the inside of the boat by the unique, direct vent design. A built-in blower provides good heat circulation. Heater is sold with all accessories including a stainless steel backing plate and 28 inches of flexible, double stainless chimney. Safe, easy to use and extremely economical.

	00-NEW-P9000	00-NEW-P12000
Ideal Boat Size	30 / 32ft	32 / 36ft
Width	8.5"	10"
Depth	5.5"	7.25"
Height	14"	16"
Weight	12lbs	20lbs
Flue Size Material	2.5 in dia. x 30" Double Stainless	
Fuel	Propane - Low Pressure	LPG (Propane/Butane)
Fuel Consumption	1 lb bottle / 20 lb bottle 7 hrs low / 140 hrs low 5 hrs high / 100 hrs high	1 lb bottle / 20 lb bottle 5.5 hrs low / 110 hrs low 3.9 hrs high / 78 hrs high
Assist Fan	12v (.17 amp)	
Heat Output	Low 3000 BTU (fan off) High 4200 BTU (fan off) Low 6000 BTU (fan on) High 9000 BTU (fan on)	Low 4000 BTU (fan off) High 5500 BTU (fan off) Low 8000 BTU (fan on) High 11500 BTU (fan on)
19-005	Optional extension with 10" pipe	
19-000	Optional extension with 30" pipe	
19-030	Optional 18" flue guard	

SIGAMAR STOVES

SigMarine has eliminated the age old problem of back drafting with their optional Balanced Draft System. This system allows the heater to use outside air rather than recycled stale cabin air, increasing efficiency and safety. The results are an optimum air-fueled mixture, producing a cleaner burning, non-smoking heater which creates dry heat and less condensation.

Sig Marine

SIGMAR 200 DIESEL STOVE

Traditional, hand-assembled classic stove with a large front loading door to make cooking easy and a large window for viewing. The temperature gauge has been specifically mounted inside the oven to give a more accurate reading. Constructed of high grade stainless steel with a cast iron top to retain heat.

	SIG20124	SIG20125
Height	23"	
Width	21"	
Depth	16.125"	
Flue Size	**4"**	**5"**
Air Intake	3"	
Fuel Consumption Gal/24 hrs	High 3 Low 1.14	
Assist Fan	12V (optional 24 & 32V)	
Heat Output	6,000 to 15,000BTU	

Sig Marine

SIGMAR 250 DIESEL STOVE

The extra width of the 250 makes for a larger oven and cooking surface. Traditional, hand-assembled classic stove with a large front loading door to make cooking easy and a large window for viewing. The temperature gauge has been specifically mounted inside the oven to give a more accurate reading. Constructed of high grade stainless steel with a cast iron top to retain heat..

	SIG25124	SIG25125
Height	23"	
Width	25"	
Depth	16.125"	
Flue Size	**4"**	**5"**
Air Intake	3"	
Fuel Consumption Gal/24 hrs	High 3 Low 1.14	
Assist Fan	12V (optional 24 & 32V)	
Heat Output	6,000 to 15,000BTU	

dickinson

BRISTOL DIESEL STOVE

Designed to fit the standard small boat cut-out. Features a small oven able to acommodate a 9" x 9" baking dish. Ideal for smaller vessels and designed primarily for a fore and aft mount. For boats up to 36ft.

	00-BRI
Width	21"
Depth	18.25"
Height	19.13"
Weight	82 lbs
Flue Size	4"
Material	Stainless / Cast Iron
Fuel	Diesel #2, #1 or Kerosene
Fuel Consumption Gal/24 hrs	1.3 low 3.20 high
Assist Fan	12v Standard (24v or 32v Optional)
Heat Output	Low 6500 BTU, High 16250 BTU
Water Coil	Optional Single Turn

dickinson

PACIFIC DIESEL STOVE

Features a double insulated stainless steel outer surface and an attractive appearance that will enhance the interior of any vessel. For boats 36ft - 42ft.

	00-PAC
Width	22.5"
Depth	20"
Height	23.75"
Weight	110lbs
Flue Size	5"
Material	Stainless / Cast Iron
Fuel	Diesel #2, #1 or Kerosene
Fuel Consumption Gal/24 hrs (lt/24 hrs)	1.3 low (5.86) 3.20 high (14.54)
Assist Fan	12v Standard (24v or 32v Optional)
Heat Output	Low 6500 BTU, High 16250 BTU
Water Coil	Optional Single or double Turn

dickinson

BERING DIESEL STOVE

Manufactured with a single stainless steel wall. This model has the chimney outlet exiting from the right side of the cast-iron top. Cooking surface and oven size similar to the Pacific. For boats 36ft - 40ft.

	00-BER
Width	24"
Depth	16.5"
Height	23.25"
Weight	89lbs
Flue Size	5"
Material	Stainless / Cast Iron
Fuel	Diesel #2, #1 or Kerosene
Fuel Consumption Gal/24 hrs (lt/24 hrs)	1.3 low (5.86) 3.20 high (14.54)
Assist Fan	12v Standard (24v or 32v Optional)
Heat Output	Low 6500 BTU, High 16250 BTU
Water Coil	Optional Single or double Turn

dickinson

ATLANTIC DIESEL STOVE

This larger model is also equipped with a bigger natural draft diesel burner. It's cooking capacity can serve a crew of 6-8 and is suitable for boats 45-60ft. Heat output is 30-50% greater than any of the smaller models. For larger vessels.

	00-ATL
Width	30.5"
Depth	21.25"
Height	28.75"
Weight	182lbs
Flue Size	5"
Material	Stainless / Cast Iron
Fuel	Diesel #2, #1 or Kerosene
Fuel Consumption Gal/24 hrs (lt/24 hrs)	1.89 low (5.86) 4.5 high (14.54)
Assist Fan	12v Standard (24v or 32v Optional)
Heat Output	Low 8125 BTU, High 24375 BTU
Water Coil	Optional Single or double Turn

dickinson ADRIATIC DIESEL STOVE

Similar in appearance to the Pacific, but for boats that are 40-50ft. Provides a larger cooking surface and a wider oven.

	00-ADR
Width	27"
Depth	20"
Height	23.75"
Weight	130lbs
Flue Size	5"
Material	Stainless / Cast Iron
Fuel	Diesel #2, #1 or Kerosene
Fuel Consumption Gal/24 hrs (lt/24 hrs)	1.3 low (5.86) 3.20 high (14.54)
Assist Fan	12v Standard (24v or 32v Optional)
Heat Output	Low 6500 BTU, High 16250 BTU
Water Coil	Optional Single or double Turn

dickinson BEAUFORT DIESEL STOVE

A stove for larger classic yachts and work boats. It weighs over 350lbs and features a cast-iron cooking surface of 24" x 36". Dry heating, hot water capability, large oven and built-in utensil storage compartment.

	00-BEA
Width	35.5"
Depth	28.5"
Height	36"
Weight	360lbs
Flue Size	5"
Material	Stainless / Cast Iron
Fuel	Diesel #2, #1 or Kerosene
Fuel Consumption Gal/24 hrs (lt/24 hrs)	1.94 low (5.86) 6.4 high (14.54)
Assist Fan	12v Standard (24v or 32v Optional)
Heat Output	Low 7750 BTU, High 32000 BTU
Water Coil	Optional Single or double Turn

Sig Marine dickinson MARINE

REPLACEMENT STOVE & HEATER PARTS

Dickinson #	Sigmar#	Description	Fits
02-000		Oil metering valve	Adriatic, Antartic, Bering, Lofoten, Pacific
02-011		Oil metering valve	Alaska, Newport
02-012		Oil metering valve	Bristol
02-001		Oil metering valve	Atlantic
02-002		Oil metering valve	Beaufort
	SIG905003	Oil metering valve	100/120
	SIG905004	Oil metering valve	170/180
	SIG905006	Oil metering valve	200/250
03-060		Superheater	Dickinson
	SIG900019	Superheater	100/120
	SIG900019	Superheater	170/180/200/250
01-031		Combustion Fan 12V	Alaska and Newport, 12V
01-030		Combustion Fan 12V	All models 12V (except Alaska and Newport)
01-072		Fan Speed Control Complete 12V	
01-081		Fan Speed Control Complete 24V	
01-091		Fan Speed Control Complete 32V	
01-074		Fan Control & Knob only 12V	
01-084		Fan Control & Knob only 24V	
01-094		Fan Control & Knob only 32V	
05-050		Mica Window 4" x 6"	Dickinson / Sigmar models with mica windows
Many other parts available please contact our sales team for details			

dickinson STAINLESS STEEL STOVE PIPE & FITTINGS

3" Dia.	4" Dia.	5" Dia	Description
16-000	17-004	18-005	Flue pipe 22" long
16-040	17-044	18-095	45 Degree Elbow
16-050	17-054	18-055	Deck Fitting with Dress Ring
16-080	17-084	18-085	"DP" Flue Cap
16-090	17-094	18-090	"H" Flue Cap
16-195		18-095	Clover Leaf Flue Cap
16-200	17-200		Jam Jar Lid (Rain Cap)
16-010	17-014		Barometric Dampener 7" long
		18-015	Barometric Dampener 9" long
16-001	17-001	18-001	Barometric Dampener 22" long
16-030	17-034	18-035	Flue Guard

dickinson HEATEX

Utilize the heat produced by your stove's exhaust. Stainless steel construction complete with 100 cfm 12 volt high-efficiency fan.

00-HEA3 3" Pipe
00-HEA4 4" Pipe
01-042 Fan assembly

Sig Marine HEAT SHIELDS

To protect your bulkhead

SIG100123 Model 100/120, s/s (5" x 12")
SIG170123 Model 170, s/s (7" x 12")

Sig Marine DRAFT ASSIST FAN

SIG905016 Fan & bracket for 200/250 12v
SIG905017 Speed control
SIG905049 Fan & cowl for Sigmar 12v

dickinson FUEL FILTER WITH BRASS SHUT-OFF

Features a manual shut-off valve. Stone element included. 1/4" female NPT.

20-010
20-020 Replacement element

dickinson LOW PRESSURE IMPULSE FUEL PUMP

Pressure set at 3 psi, for standard installations. 12v. For lifts under 6'.

20-000

dickinson HEAVY DUTY IMPULSE FUEL PUMP

Pump with regulator. For lifts above 6'. Adjustable pressure. 12v.

20-002

dickinson RADEX HEATER

Hot water, forced air heater available in two sizes. Stainless Steel construction. Uses 3/4" ID. hose to run off your engine cooling system. Mounts must be ordered separately.

Radex 1: 7"Hx 10.38"W x 5"D. 12V, 0.74 amp, 100 CFM air flow
Radex 2: 7"H x16.88"W x 5"D. 12V, 1.48 amp, 200 CFM air flow

00-RAD1 Single.12 000 BTU
00-RAD2 Double. 24 000 BTU
22-001 Wall mount
22-002 Flush mount for RAD1
22-003 Flush mount for RAD2

HEATER CRAFT ELECTRIC AND HYDRONIC CABIN HEATER

ELECTRIC AND HYDRONIC CABIN HEATER

Innovative design functions as a hydronic heater when underway delivering up to 9000 BTU/h of heat. Or use as an electric heater with 2727.6 BTU/h of heat when 110VAC is available. Forget about the hassle and worry of plugging in multiple space heaters, the 500EH features a built in ground fault circuit interrupter (GFCI).

- Hydronic: 12VDC
- Air flow: 250 cfm
- Hydronic: Max est. BTU/h 9000
- Hydronic: 5/8" or 3/4" hose barb
- Electric: Max est. BTU/h 2727.6
- Electric 110VAC
- 7.5"H x 15"W x 6.5"D

HEA500EH

HEATER CRAFT®

HEATER CRAFT HYDRONIC HEATERS

Heater Craft offers a system that turns your engine cooling fluids into useful cabin heat. An extensive line of heating and defrosting units can be configured to suit your boat. Constructed using aluminum, stainless steel and plastic, along with powder coating to ensure long life in the harsh marine environment. Units are ignition protected and are warrantied for 2 years.

Standard accessories in all kits: 1-Heater unit with wire harness, 2-Universal mounting brackets with screws, Heavy-duty wire ties, 1-Switch plate and indicator assembly and 2-6' lengths of 14 gauge wire

ACU-HEAT HEATER SYSTEMS

2-H Series Hydronic Heater Kits	
Perfect for the family Runabout. 28,000 BTU/hr's of glorious heat is easily vented to bow or rear seating areas while second can be ducted to the helm	
Amperage:	Low 4.4, Med 5.8, High 8.5
BTU:	28,000
Air Flow:	Low 230 cfm, Med 228 cfm, High 263 cfm.
Hose barb:	5/8" or 3/4"
Size:	6.4"H x 9.4"W x 9.45"D
HEA201HB	**201-H-B Basic 2 Outlet Heater Kit** Kit includes the Standard kit accessories plus 1-12' length of 3" vent hose and 2-directional Euro vents.
HEA203HB	**203-H-B Basic 2 Outlet Heater Kit** Kit includes the Standard kit accessories plus 1-6' lengths of 3" vent hose, 1-directional Euro vent and 1-Hot Tube™ adjustable vent.
HEA203HC	**203-H-C Complete 2 Outlet Heater Kit** Kit includes the Standard kit accessories plus 4-#8 Stainless steel hose clamps, 1-6' lengths of 3" vent hose, 6-Brass fittings, 1-25' x 5/8" heater hose, 1-directional Euro vent and 1-Hot Tube™ adjustable vent.
3-H Series Hydronic Heater Kits	
High output with lots of flexibility. 40,000 BTU/hr of heat is ducted to 3 or 4 separate areas of the boat, keeping everyone warm and toasty.	
Amperage:	Low 4.7, Med 6.3, High 9.2
BTU:	40,000
Air Flow:	Low 188 cfm, Med 250 cfm, High 266 cfm.
Hose barb:	5/8"
Size:	6.6"H x 15.95"W x 9.4"D
HEA301HB	**301-H-B Basic 3 Outlet Heater Kit** Kit includes the Standard kit accessories plus 1-18' length of 3" vent hose and 3-directional Euro vents.
HEA303HB	**303-H-B Basic 3 Outlet Heater Kit** Kit includes the Standard kit accessories plus 1-12' length of 3" vent hose, 2-directional Euro vents and 1-Hot Tube™ adjustable vent.
HEA317H4B	**317-H4-B Basic 4 Outlet Heater Kit** Kit includes the Standard kit accessories plus 2-6' lengths of 14 gauge wire, 1-24' lengths of 3" vent hose and 4-directional Euro vents.
5-H Series Flush Grill Basic heater kit (501-H-B)	
From fishing to sailing and all I/O or inboard powered boats in between. This 28,000 BTU/h flush mount, grilled heater, fits easily in stairwells, cabin interiors or cockpit areas.	
Amperage:	Low 4.9, Med 6.6, High 9.6
BTU:	28,000
Air Flow:	Low 172 cfm, Med 228 cfm, High 263 cfm..
Hose barb:	5/8" or 3/4"
Size:	6.4"H x 9.4"W x 8.7"D
Grill Size:	7.5"H x 11.3"
HEA501HB	Kit includes 1-Heater unit with wire harness, 1-Flush mount grill 1-4 position switch and mounting plate and 2-6' lengths of 14 gauge wire

HEATER CRAFT®

H-521 HOT TUBE™

Allows regulation of air flow from wide open to completely off. When not extended Hot Tube™ acts as a traditional adjustable heating vent.

- An extendible vent that can be pulled out approximately 6 ft. from its housing
- 3" vent hose from rear of housing
- Use it to direct heat right where it's needed most
- Vent face is 4.6" in diameter
- 9.85" depth of housing

HEAH521B Black

RED DOT HEATERS

These heaters utilize your engines cooling system to heat your boat while underway. Their long standing reputation in the marine and automotive industries make them the perfect choice for your heating requirements. Both models feature 5/8" hose connections and two speed fan motors.

	Description	Heat Output	Air Output	Size
R-254	Single fan heater	16,000BTU	230CFM	6.45" H x 9.52" W x 7.25" D
R-255	Double fan heater	30,000BTU	340CFM	6.45" H x 16" W x 7.25" D

1700 SERIES WATER HEATER

World-renowned water heater specially designed for the marine environment. Provides the comfort and convenience of reliable hot water.

- Attractive polymer jacket will not corrode
- Glass-lined steel tank - more durable than stainless steel
- Withstands the rigors of the marine environment
- Ignition-protected thermostat
- Adjustable thermostatic control
- Engineered for long life and high efficiency
- Replaceable magnesium anode to protect tank
- The tank is covered by a five-year Limited Warranty
- Comes with 120v AC & heat exchanger

	Capacity (Gallons)	Voltage	Dimensions (Diameter x Height)
170611	6	120VAC	14-1/2" x 16-1/4"
171211	12	120VAC	18-3/4" x 16-1/4"
172011	20	120VAC	18-3/4" x 24-1/2"

WATER HEATERS

These corrosion-resistant water heaters have aluminum tanks and stainless steel casings. A large heat exchanger with a 1/2" NPT connection for easy installation ensures more efficient heat control through increased surface area. The 1500 watt heating element ensures quick service. Complete with ignition-protected controls, high temperature, and high pressure valve installed.

	Capacity (Gallons)	Voltage	Exchanger Location	Mount Bracket Location	Dimensions (W x L x H)
CAM11810	6	120VAC	Front	Side	13-5/8" x 19-1/2" x 13-1/2"
CAM11811	6	120VAC	Front	Front	13-5/8" x 19-1/2" x 13-1/2"
CAM11812	6	120VAC	Front	Front	13-5/8" x 19-1/2" x 13-1/2"
CAM11840	11	120VAC	Front	Side	16" x 22" x 16"
CAM11841	11	120VAC	Front	Front	16" x 22" x 16"
CAM11842	11	120VAC	Rear	Front	16" x 22" x 16"
CAM11870	20	120VAC	Front Vertical	Bottom	16-1/2" x 16-1/2" x 29-1/2"

Dometic BREATHE EASY PORTABLE AIR PURIFIER

Reduces Contaminants & Stops Odors

Reduce the odors of tobacco smoke, mildew, mustiness, chemical vapors and toilets, inhale fresher, cleaner, healthier air. Effective in areas up to 100 sq. ft. (9.3 sq. m.), the portable Breathe Easy Air Purifier uses innovative Photocatalytic Nano-Mesh technology with ultraviolet (UV) light to improve air quality. The UV bulb inside uses a specific frequency of light that produces no harmful ozone. The unit operates quietly and has two fan-speed settings.

4210805

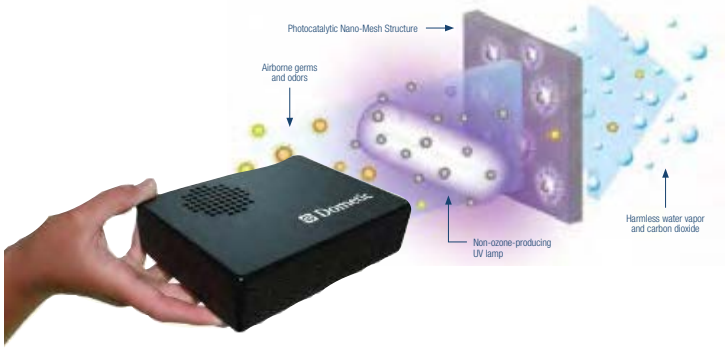

Dometic

ENVIROCOMFORT
AIR CONDITIONING KITS (COOLING & HEATING)

Climate Control at the Touch of a Button

Enjoy ideal temperatures in your boating environment year-round with Dometic's EnviroComfort air conditioning systems. All EnviroComfort models use R-417A refrigerant, an environmentally safe gas. The EnviroComfort kit includes everything needed for a professional installation on boats with or without an existing air conditioning system. EnviroComfort units use high-velocity blowers that eliminate blower-motor overhang for a smaller installation footprint. For flexibility in connecting to ductwork, the blower is rotatable to either a horizontal or vertical position. The compact, space-saving design is contained in a stainless-steel drain pan, and the pre installed return-air filter is easily removable and cleanable. For system operation, EnviroComfort kits include a compact Dometic digital display control. For added installation convenience, the plastic electrical box can be mounted remotely. For applications requiring an additional air outlet, Dometic's dual-duct kit (shown at left) is available for EnviroComfort models with BTU/hr capacities of 6.5K and higher.



Dometic	ECD05	ECD06.5	ECD09	ECD11	ECD15
	207400301	207400304	207400305	207400307	207400310
Capacity (BTU/hr)	5000	6500	9000	11000	15000
Full Load Amps - Cool	3.9	5.4	6.0	6.8	9.4
Full Load Amps - Heat	5.1	7	8.3	9.4	12.4
Voltage	115VAC 60Hz (50Hz models also available)				
Seawater Connection	5/8"				
Refrigeratt Type	R417A				
Height	11.25"	12.25"	13"	14.25"	14.25"
Width	17.83"	13.25"	14.25"	14.25"	14.25"
Depth	8.92"	17.75"	18.25"	18.25"	19.88"
226600091	Dual vent kit for 5000-6500 btu				
226600092	Dual vent kit for 9000-1500 btu				





Dometic

ENVIROCOOL AIR CONDITIONING KITS (COOLING)

Climate Control at the Touch of a Button

Enjoy ideal temperatures in your boating environment with Dometic's EnviroCool Series of marine air conditioning kits. The EnviroCool series uses environmentally safe R-134A (3.5K BTU/hr. model) and R-417A (5K - 15K BTU/hr. models) refrigerants. The EnviroCool kit includes everything needed for a professional installation on boats with or without an air conditioning system. EnviroCool units use high-velocity blowers that eliminate blower-motor overhang for a smaller installation footprint. For flexibility in connecting to ductwork, the blower is rotatable to either a horizontal or vertical position. The compact, space saving design is contained in a stainless-steel drain pan, and the pre-installed return-air filter is easily removable and cleanable. For system operation, EnviroCool uses a two-knob mechanical switch for reliable control over air conditioner functions.

Dometic	ECM05	ECM6.5	ECM09	ECM11	ECM15
	207444301	207444304	207444305	207444307	207444309
Capacity (BTU/hr)	5000	6500	9000	11000	15000
Full Load Amps - Cool	3.9	5.4	6.0	6.8	9.4
Voltage	115VAC 60Hz (50Hz models also available)				
Seawater Connection	5/8"				
Refrigeratt Type	R417A				
Height	1.25"	12.25"	13"	14.25"	14.25"
Width	17.83"	13.25"	14.25"	14.25"	14.25"
Depth	8.92"	17.75"	18.25"	18.25"	19.88"
226600091	Dual vent kit for 5000-6500 BTU				
226600092	Dual vent kit for 9000-1500 BTU				





Dometic

CF SERIES PORTABLE REFRIGERATORS/FREEZERS

CF Series refrigerators/freezers offer powerful cooling and deepfreezing from 50° to 0°F and state-of-the-art electronics with battery monitor, low-voltage shut-off and a memory feature that maintains presets if the system is turned off. There's an ideal appliance for every requirement – from the slim 19-quart model to the extra-large capacity 113-quart model. The CF Series features a quick-chill/turbo function which runs the compressor at maximum performance until the desired temperature is reached. All models work perfectly, even in inclined positions. Special electronics include a digital temperature display in Fahrenheit or Celsius. Seven models (CF-18 to CF-110) are equipped with a unique soft-touch operating panel.

	CF-018DC	CF-025DC	CF-035AC	CF-040AC	CF-050DC	CF-050AC	CF-080AC	CF-110AC
Gross Capacity (qt. / cu. ft.)	**19 / 0.70**	**24 / 0.90**	**33 / 1.10**	**39 / 1.30**	**52 / 1.70**		**85 / 2.80**	**113 / 3.77**
12 oz. Can Capacity	23	27	41	48	68		103	144
Voltage	12/24V DC	12/24V DC	12/24V DC, 100-240V AC	12/24V DC, 100-240V AC	12/24V DC	12/24V DC, 100-240V AC	12/24V DC, 100-240V AC	12/24V DC, 100-240V AC
Avg. Power Consumption	35W, 2.9A	35W, 2.9A	45W, 3.75A	45W, 3.75A	45W, 3.75A		55W, 4.5A	55W, 4.5A
Insulation	CFC-free polyurethane foam							
Compressor	Danfoss BD35F							
Refrigerant	R-134A							
Cabinet Material	High-impact polypropylene						Coated sheet steel	Coated sheet steel
Lid Material	Weather-resistant polyethylene							
L x H x W	18" x 16" x 12"	21.7" x 16.7" x 10.2	22.8" x 15.1" x 14"	22.8" x 17.5" x 14"	24.8" x 19.4" x 14"		31" x 18.1" x 19.6"	31" x 22" x 19.6"
Net Weight (lbs)	25	27.5	33	35	40		68	73
Lid	Hinged	Removable	Removable	Removable	Removable		Hinged	Hinged
Interior Light	No		Yes					
Special Electronics	No	Yes						
Carry handles	Yes	No	Yes (Removable)					
Removable Basket	No	Yes						Yes (x2)
Insulated Cover	**IC-18**	**IC-25**	**IC-35**	**IC-40**	**IC-50**		**IC-80**	**IC-110**
AC Adapter	**MPS-50**	**MPS-50**	N/A	N/A	**MPS-50**	N/A	N/A	N/A

Dometic

CR SERIES REFRIGERATORS/FREEZERS

Luxury meets performance and top-of-the-line technology with Dometic's CR Series of premium refrigerators with freezer compartments. CR refrigerator/freezers are constructed for the rigors of marine use, but designed to compliment any galley or cockpit. Each CR Series appliance is equipped with a premium Danfoss DC compressor, providing excellent cooling performance, ultra-quiet operation, and minimal power consumption whether operating on DC or AC power. During rough sea conditions, the door remains securely closed—at top and bottom—as a result of the patented double-lock mechanism. The CR's vent mechanism holds the door open slightly for easy defrosting and mildew prevention. The door can be set to open to the left or right to accommodate any galley configuration. All CR Series refrigerators feature protected evaporators that eliminate the risk of ice-pick damage, a cool-blue interior light, diagnostic circuitry installed with green and red LED indicator lights, recessed handles for a smooth, sleek surface. Egg tray, bottle holder, extra large vegetable bin, and adjustable shelves and racks included.

Style				
Black face panel, black door surround, black flushmount flange	**CR-1050U/F**	**CR-1065U/F**	**CR-1080U/F**	**CR-1110U/F**
White face panel, silver door surround, silver flushmount flange	**CR-1050E/F-W ***	**CR-1065E/F-W ***		
Stainless-steel face panel, silver door surround, silver flush-mount flange	**CR-1050E/F-S ***	**CR-1065E/F-S ***	**CR-1080E/F-S ***	**CR-1110E/F-S ***
Freezer Gross Capacity	4.8 quarts (4.5 liters)	4.8 quarts (4.5 liters)	4.8 quarts (4.5 liters)	8.9 quarts (8.4 liters)
Refrigerator Gross Capacity	1.7 cu ft (48.1 liters)	2.3 cu ft (65.1 liters)	2.8 cu ft (79.1 liters)	3.8 cu ft (107 liters)
Voltage	12/24V DC (110/220V AC)			
Avg. Power Consumption	40 watts (3.3 amps)	40 watts (3.3 amps)	40 watts (3.3 amps)	45 watts (3.75 amps)
Insulation	CFC-free polyurethane			
Compressor	Danfoss BD35F			
Refrigerant	Environmentally safe R-134A			
Material	Stainless-steel fittings, plastic interior, door frame in plastic body with coated-metal frame			
Cut-Out Dimensions with flush-mount flange	16.1" W x 21.3" H x 19.6" D	18.8" W x 21.1" H x 21.3" D	19.9" W x 25.6" H x 20.9" D	21.6" W x 29.8" H x 22.1" D
Cut-Out Dimensions with space-saver flange	15.1" W x 21.0" H x 17.7" D	17.9" W x 21.1" H x 19.4" D	18.9" W x 25.5" H x 19.0" D	20.6" W x 29.7" H x 20.1" D
Optional Space-Saver Flange	EST-0050U: Black EST-0050E: Silver	EST-0065U: Black EST-0065E: Silver	EST-0080U: Black EST-0080E: Silver	EST-0110U: Black EST-0110E: Silver

* Available by special order

Dometic

RS-SERIES BUILT-IN REFRIGERATOR / FREEZER WITH STAINLESS INTERIOR

These attractive built-in units are each equipped with a powerful Danfoss compressor and can be used as a stand-alone installation or paired to create a cool side-by-side combination. The unique double lock door mechanism locks the door closed, top and bottom. When the unit is not in use this lock also holds the door slightly open for ventilation. The handle runs the full width for ease of use.

- Brushed stainless-steel finish
- Reversible door opening
- Interior light

Gross Capacity: 3.94 cubic feet (RSD), 3.9 cubic feet (RSF)
Voltage: 12/24 volts DC.
Average Power Consumption: 45W / 3.3A (RSD), 50W / 4.1A (RSF)
Color: Stainless-steel face panel, black door surround, black flange
Cut-Out Dimensions: 20.5"W x 29.12"H x 22"D
Standard Mount, Black#: EST-0400
Flush Mount, Black#: EFM-0400

RSD-0115E Refrigerator
RSF-0115E Freezer

AC/DC REFRIGERATORS/FREEZERS

Features that set the standard in AC/DC refrigeration:

- Exceptionally quiet, hermetically sealed compressor
- Expressly designed for reliability in marine and mobile applications
- Easy, accessible storage with adjustable, removable door bins
- 1/8" black door panel can be switched to match your interior
- Durable and easy to clean white powder coated shelves
- Easy open and close door latches - even under the counter
- Reversible door
- Off level operation up to 30°
- 12 volt fan aids airflow across condenser and compressor for improved cooling
- Over current protection
- Automatic AC to DC change over
- Integral freezer for ice cube trays and more

DE-0740 REFRIGERATOR

Ergonomically designed and built to withstand the vibration of the marine environment the DE0740 offers the highest performance in a compact model.

- Powder coated food storage prevents rusting
- Door bin holds 2-liter bottles
- New and improved handle/latch for a positive lock
- Integral venting eliminates need for additional or exterior venting
- Over-current protection

Cut out dimensions: 20-1/2"H x 15-1/4"W x 17-1/4"D
Interior Volume - 1.7 cu. ft
Voltage: 12VDC / 120VAC
Amperage draw @ 12VDC: 2.7A

DE0740BB Black with standard door
DE0740W Stainless with wrapped edge door

DE-0751 REFRIGERATOR

The sleekly styled DE-0751 Marine can withstand the harsh exposure to sun and salt with uncompromised performance.

- Flush and proud mount capability
- Door liner features 2 bins, lower bin holds 2-liter bottles
- Ergonomic handle/latch is integrated with door for a positive lock
- Controls and power supply at top for easy access
- Integrated circuit to sense high-current and auto re-set
- Heavy duty hinges are durable in the roughest conditions

Enclosure cut out dimensions: 20-1/2"H x 18-1/2"W x 21"D
Interior Volume - 2.7 cu. ft
Voltage: 12VDC / 120VAC
Amperage draw @ 12VDC: 3A

DE0751BB Black with standard door
DE0751W Stainless with wrapped edge door

DE-0041 REFRIGERATOR

- Interior light
- Convenient top-mounted controls
- Easy open/close door latches - even under the counter
- Self-ventilated design for easier integration
- Improved cooling performance in higher ambient temperatures
- Full width freezer compartment
- Adjustable door bins allow for various container sizes
- Contemporary Flushmount styling
- Black exterior trim with optional door panel

Cut out dimensions: 30-7/8"H x 23-1/4"W x 23-1/2"D
Interior volume - 3.6 cu. ft
Voltage: 12VDC / 120VAC
Amperage draw @ 12VDC: 2.8A

DE0041 Black

NORCOLD

DE-0788 UNDERCOUNTER REFRIGERATORS

THETFORD MARINE

- Refrigerator/Freezer combination (3.1-cubic feet of storage – 0788 models)
- Refrigerator only (3.6-cubic feet of storage – R788 models)
- Freezer only (3.6-cubic feet of storage – F788 models)
- Hermetically-sealed compressor
- Self-venting capability
- Flush, undercounter mounting
- Sharp black or stainless finishes
- Powder-coated food-storage racks prevent rusting
- Over-current protection
- Low-power consumption
- Wrapped-edge doors are reversible and replaceable
- Two units make the perfect side-by-side refrigerator and freezer!

Enclosure cut-out dimensions: 30-7/8"H x 20-1/2"W x 20-1/8"D
Voltage: 12VDC / 120VAC
Amperage draw @ 12VDC: DE0788 3A, DEF788 4.8A, DER788 3.3A

DE0788B Refrigerator/Freezer, Black
DEF788B Freezer only, Black
DER788B Refrigerator only, Black

NORCOLD

DE-0061 REFRIGERATOR

Top-of-the-line, Two-door Model with Contemporary Flushmount™ styling.
A large freezer – 1.7 cubic feet – on top of an even larger refrigerator – 5.3 cubic feet.

- New interior light
- Self-ventilated design for easier integration
- Hermetically-sealed compressor
- Reversible, safe and stylish recessed doors
- 12-volt fan aids airflow across condenser and compressor for improved cooling
- Black exterior trim with optional door panel
- Storage for varied sizes, including 2-liter, 1/2-gallon and 1-gallon containers
- Adjustable, removable, large container door bin storage
- Easy-clean, no-tarnish white powder-coated shelves
- Easy open and close door latches - even under the counter

Enclosure cut out dimensions: 52-7/8"H x 23-1/4"W x 24-3/4"D
Interior volume - 7 cu. ft
Voltage: 12VDC / 120VAC
Amperage draw @ 12VDC: 3.2A

DE0061 Black

Dometic

CB SERIES
TOP LOADING REFRIGERATORS/FREEZERS

The top-loading CB Series can operate as built-in refrigerators or freezers depending on the temperature you set. Available in 1.3 cu. ft. (36 liters), 1.4 cu. ft. (39 liters), and 3.5 cu. ft. (100 liters) capacities. These units have energy-efficient Danfoss compressors that run on 12/24V DC power or 110/220V AC power (optional). A CB unit permanently installs in a cupboard space and continues working even in inclined positions. Its lift-off lid has superior seal and insulation and can accommodate a laminate to match your countertops.

	CB-36	CB-40	CB-110
Gross Capacity	1.3 cu. ft. (36 liters)	1.4 cu. ft. (39 liters)	3.5 cu. ft. (100 liters)
Voltage	12/24V DC 110/220VAC Optional (AC Adapter# MPS-35)		
Avg. Power Consumption	3.75 amps		
Insulation	1.6" polyurethane foam		2.0" polyurethane foam
Compressor	Danfoss BD35F		
Refrigerant	Environmentally safe R-134A		
Material	Zinc-coated sheet steel with stainless-steel interior; shock resistant plastic base.		
Cut-Out Dim. (WxHxD)	16" x 16" x 23"	13.3" x 26" x 19.7"	19.1" x 25.6" x 31.7"
Net Weight	41 lbs.	44 lbs.	62 lbs.

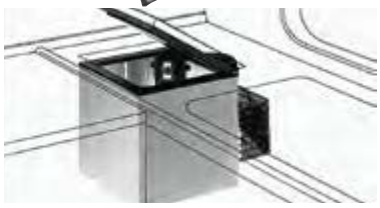

Dometic

CD-030 DRAWER REFRIGERATOR

This compact refrigerator turns any unused nook into a practical 31 quart (29 liter) cooler. The CD-030 permanently installs in any cupboard space. A convenient variable thermostat protects your contents from freezing and the Danfoss compressor is extremely energy efficient. For installation flexibility, the compressor can be mounted on the unit's rear, left or right side or up to 5 ft. (1.5 m) away. The CD-030 drawer refrigerator provides a very energy efficient, flexible solution for boats with limited space.
Voltage 12/24VDC Average power consumption 3.3 amps. Optional 110/240VAC adapter available. 9.8"H x 17.3"W x 22"D.

CD-30 Black
CD-30W White
MPS-35 AC adapter

Dometic

120V PORTABLE ICE MAKER

The Dometic HZB-15S portable ice maker makes it possible for you to have ice where and when you need it. The efficient HZB-15S provides fast ice production for entertaining at backyard parties or on-the-go events at the park, campsite or when boating. The first batch of ice is ready in just 15 minutes. Use the front-mounted LED display/control panel to select one of three cube sizes and the ice maker does the rest. The ice storage bin has an energy saving lid with a window that lets you check the ice level without losing cold.

- Makes 33 lbs. of ice every 24 hours
- Removable basket holds 2.5 lbs. of ice
- Makes three sizes of ice cubes
- Ice is ready 15 minutes after starting
- Easy-to-use LED display/control panel
- Slotted ice basket allows water from melting ice to be recycled into more ice
- Automatic shutoff when water is low
- Automatic shutoff when ice basket is full
- Stainless-steel finish
- Ice scoop included
- Self-storing drain fitting

HZB-15S

RARITAN

ICER-ETTE™ 120V ICEMAKERS

- Door can be hinged for right or left hand opening
- Door panels can be easily changed to match any decor
- Magnetic, positive latching, door seal for more efficient operation
- Automatically stops ice production when bucket is full
- Produces over 22 lbs of ice per day, stores up to 11 lbs of ice
- Ice bucket is removable and dishwasher safe
- Marine grade non-corrosive components
- Emits less noise than competitive products
- Anti-shock technology safeguards from the effects of hard jolts due to rough sea conditions
- No circuit board, avoiding common problems of salt air and power surges
- No drain required
- Each unit is assembled by hand, individually tested
- Five-year warranty on compressor and one-year limited warranty on complete unit

Icerette
AUTOMATIC ICE CUBE MAKER

(style E) trim kit keeps door flush with the outside
(style B) trim kit where greater visibility of the door is desired.
Cutout Dimensions (Model 84): 18-3/8" x 14" **(Model 85):** 24" x 14"

84B515-1 Built-in, 19-1/2" x 15-3/8" with flange
85B515-1 Built-in flange, 25-1/4" x 15-3/8" with flange
84E515-1 Flush mount flange, 19-1/2" x 15-3/8" with flange
85E515-1 Flush mount flange, 25-1/4" x 15-3/8" with flange
84F515-1 Free standing, 18-3/8"x 14" x 22-1/4"
85F515-1 Free standing, 24"x 14" x 14-1/2"

Dometic

COOLMATIC COOLING UNIT

The CS-NC-15 compact cooling kit consists of the high-performance air-circulating VD-15 fin evaporator and the power-regulated CoolMatic cooling unit. These two units in one kit offer a perfect match of rapid-chill capability and high cooling performance. The tried and tested Danfoss BD35F compressor ensures economical and super quiet operation. This cooling unit is specifically designed for chest coolers with capacities from 2.12 cu. ft. (60 liters) for deep freezing to 8.8 cu. ft. (249 liters) for normal refrigeration. Installation is quick and easy. All that's required is a hole cut to match the size of the cooling kit. The CS-NC-15 is then simply screwed from inside to the mounting plate. 12/24V DC. 10.6"W x 14.3"H x 8.9"D.

CS-NC-15

MPS-35 AC adapter

Dometic

Select one of these cooling units to pair with any evaporator of the same series on this page.

COOLMATIC 50 SERIES COOLING UNITS

Designed for small refrigerator capacities and for use in cool water

- 35 or 40 watts depending on evaporator type
- Cooling volume of up to 4.6 cubic feet max. for normal refrigeration
- Fully hermetic Danfoss BD35F compressor with control electronics and integrated low-voltage protection; low voltage cut off adjustable for house or starter battery. Fan cooled wire and tube condenser; self-sealing valve couplings

50 Series Cooling Units		
	CU-54	**CU-55**
	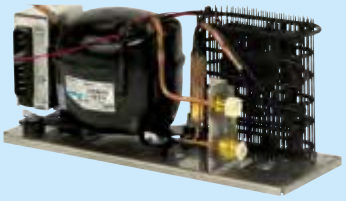	
Capacity	130 litres max. normal refrigeration with direct evaporators, 100 litres max. with cold accumulators	
Voltage	12 / 24 volts DC	12 / 24 volts DC
Configuration	Horizontal Platform	Square Layout
Dimensions	386 x 165 x 130 mm	220 x 160 x 220 mm
Net Weight	13.2 lbs	14.3 lbs

50 Series Evaporating Units for 50 Series Cooling Units		
	VD-01	**VD-02**
Capacity	2.8 cubic feet max. with an insulation of 2" polyurethane, 3.5 cubic feet max. with an insulation of 3" polyurethane	1 cubic ft. max. with an insulation of 2" polyurethane; 1.75 cubic ft. max. with an insulation of 3" polyurethane
Configuration	"L" shape	Plate
Dimensions	3.5"D x 11.8"W x 9.6"H	1"D x 10.8"W x 8.5"H
Net Weight	3.3 lbs	2.2lbs
	VD-07	**VD-17**
Capacity	3.5 cubic ft. max. with an insulation of 2" polyurethane; 4.5 cubic ft. max with an insulation of 3" polyurethane	2.8 cubic ft. max. with an insulation of 2" polyurethane; 3.5 cubic ft. max with an insulation of 3" polyurethane
Configuration	"O" shape	Cold accumulator
Dimensions	3.5"D x 10"W x 8.2"H	4.9"D x 12.4"W x 8.5"H
Net Weight	3.3 lbs	7.8 lbs

Select one of these cooling units to pair with any evaporator of the same series on this page.

Dometic

COOLMATIC 80 SERIES COOLING UNITS

Designed for small and medium refrigerator capacities and for use in warmer water.

- 45-60 watts, depending on evaporator type
- 8.8 cubic feet maximum for normal cooling or 2.5 cubic feet maximum for deep-freezing applications
- Cooling unit: fully hermetic Danfoss BD35F compressor with control electronics and integrated low-voltage protection; low voltage cutoff. Brushless DC fan; forced air condenser; self-sealing valve couplings. Suited for ground installation.

80 Series Cooling Units			
	CU-84	**CU-85**	**CU-86**
	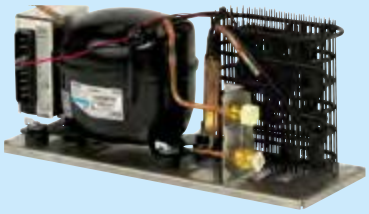		
Capacity	Refrigeration: 8.83 cu. ft. (250 liters) Deep freezing: 2.47 cu. ft. (70 liters)	Refrigeration: 8.83 cu. ft. (250 liters) Deep freezing: 2.47 cu. ft. (70 liters)	Refrigeration: 8.83 cu. ft. (250 liters) Deep freezing: 2.47 cu. ft. (70 liters)
Voltage	12/24V DC	12/24V DC	12/24V DC
Configuration	Horizontal Platform	Square Layout	Vertical or Wall Mount
Dimensions	15.2"W x 6.1"H x 5.1"D	8.7"W x 6.1"H x 8.7"D	8.7"W x 9.0"H x 7.6"D
Net Weight	13.2 lbs.	13.2 lbs.	14.3 lbs.

80 Series Evaporators for 80 Series Cooling Units			
	VD-04	**VD-05**	**VD-08**
Capacity	4.5 cu. ft. (127 liters)	4.5 cu. ft. (127 liters)	5.6 cu. ft. (158 liters)
Configuration	“L” shape	Plate	90° Angle
Dimensions	14.8 in. x 10.0 in. x 3.9	14.8 in. x 13.7 in. x 1.0	13.4 in. x 17.7 in. x 10.6
Net Weight	3.3 lbs.	3.3 lbs.	4.4 lbs.
	VD-09	**VD-15**	**VD-18**
Capacity	5.6 cu. ft. (158 liters)	7.0 cu. ft. (198 liters)	4.5 cu. ft. (127 liters)
Configuration	“O” shape	Circulating Air	Plate
Dimensions	14.4 in. x 5.5 in. x 10.6	8.6 in. x 10.8 in. x 2.6	9.8 in. x 13.7 in. x 1.0
Net Weight	4.4 lbs	4.4 lbs.	3.1 lbs

Dometic

Select one of these cooling units to pair with any evaporator of the same series on this page.

ADLER/BARBOUR COLDMACHINE COOLING UNITS

Performance, efficiency and quality are hallmarks of Adler/Barbour ColdMachine Kits by Dometic. Two configurations are offered: The air-cooled CU-100 ColdMachine, and the air and water cooled CU-200 SuperColdMachine. Powered by a Danfoss BD50F compressor, these easy-to-install units provide up to 15 cu. ft. (424 liters) of refrigeration and work with a variety of 100-Series evaporators (see reverse side). ColdMachines are specifically designed to survive the rigors of the harsh marine environment and to provide exceptional performance in hot and humid conditions, erratic or low voltage and continuous use. ColdMachine kits now come with self-sealing quick-connect fittings for easy attachment. Unlike the old "one-shot" connections, quick-connect fittings can be disconnected and reconnected whenever necessary without loss of refrigerant or exposing the system to air or moisture.

ColdMachine Cooling Units

	755400000	755410000
Capacity	15.0 cu. ft. (424 liters)	15.0 cu. ft. (424 liters)
Voltage	12V DC	12V DC
Application	General Boating	Tropical-Water Boating
Dimensions	10.0 in. x 7.5 in. x 11.1	10.0 in. x 7.5 in. x 11.1
Net Weight	18 lbs	18 lbs

50 Series Evaporating Units for 50 Series Cooling Units

	755500000	755510000
Capacity	9.0 cu. ft. (254 liters)	9.0 cu. ft. (254 liters)
Application	Medium-sized refrigerator to small freezer	Medium-sized refrigerator to small freezer
Configuration	Closed evaporator	Closed evaporator with door
Dimensions	10.5 in. x 11.0 in. x 6.0	10.75 in. x 7.0 in. x 11.25
Net Weight	12 lbs	10 lbs

	755520000	755530000
Capacity	15.0 cu. ft. (424 liters)	15.0 cu. ft. (424 liters)
Application	Large-sized refrigerator to medium freezer	Large-sized refrigerator to medium freezer
Configuration	Closed evaporator	Closed evaporator with door
Dimensions	15.0 in. x 12.0 in. x 6.0	15.5 in. x 7.5 in. x 12.0
Net Weight	13 lbs	14 lbs

	755560000	Accessories for ColdMachines		
		C8350	Cool water kit, Includes 12V water pump, discharge thru-hull, sea strainer, hose and clamps	
		C8071	For 755400000	Booster power duct kit, 8' of 4" flex duct, 3 adapter flanges and additional booster fan. 12VDC
		C8075	For 755410000	
Capacity	4 cu. ft. (113 liters)	**C8070**	For 755400000	Ventalation duct kit, 3' of 4" flex duct, 1 adapter flange and trim grill.
Application	Medium to small-sized freezer	**C8079**	For 755410000	
Configuration	Power plate with holdover capabilities			
Dimensions	19.0 in. x 11.25 in. 1.25			
Net Weight	23 lbs			

TRIDENT MARINE

ALUMINUM CYLINDERS

With new Type 1 valves and Overfill Prevention Device (OPD). High strength, brushed aluminum LPG cylinders are lightweight and maintenance free. They are just what recreational and commercial boaters need to end unsightly and dangerous rust and corrosion forever. Manufactured to D.O.T. specifications. All 10# and 20# cylinders are also TC approved for Canada.

1410-0010	10# vertical	16-1/2"H x 10-1/2"OD (approx.)
1410-0020	20# vertical	20-5/8"H x 12-1/2"OD (approx.)

TRIDENT MARINE

COMPOSITE TANK

With new advances in technology comes a transparent composite cylinder. The gas level is visible thanks to the special see-through construction. Propane capacity of 11 lbs. Overall height 15.5", 12" dia. TC approved.

1420-0011

Ebolton

PROPANE TANK HOLDER

All stainless steel, electropolished.
Designed for 20 lb tanks. Transom mount.

BOLBPH

TRIDENT MARINE

STRAIGHT-THRU FITTING LIQUID AND VAPOUR TIGHT

Meets ABYC Standard for non-abrasive, vapour tight (non-pressurized) seal of continuous length of LPG supply line passing "Straight-Thru" water tight bulkheads and decks from inside cylinder locker to each appliance.

1438-8439 For LPG hose assembly, 1/2" max. bulkhead
1438-8876 For 1/4"-3/8" copper tubing, 3/8" amx. bulkhead

HIGH PRESSURE GAS GRILL CONNECTION TEE STYLE

Pressure tee to be installed between cylinder valve and regulator or pigtail POL fitting.

Trident	Kuuma	
G415	**CAM58272**	Tee only
G415-72		With 6' hose

HIGH PRESSURE GAS GRILL HOSE (TEE STYLE)

Solid brass swivel fitting
1" 20 female for tee connection
x 1" 20 male with "O" ring and check valve.

Trident		Kuuma		Dickinson	
42421-72	6'	**CAM58281**	6'	**15-191**	6'
42421-144	12'	**CAM58283**	8'	**15-192**	8'

HIGH PRESSURE GAS GRILL HOSE

Converts gas grill from small disposable bottles to a larger refillable cylinder. Hand wheel POL cylinder fitting, 1" 20 swivel male with "O" ring and check valve.

Trident		Kuuma		Dickinson	
40407-72	6'	**CAM58280**	6'	**15-188**	6'
40407-144	12'	**CAM58282**	8'	**15-189**	8'

TRIDENT MARINE

DISPOSABLE CYLINDER ADAPTER

Simply connect the POL fitting to a female POL adapter fitting. Then connect a disposable bottle to the female adapter fitting. Solid brass.

G487

TRIDENT MARINE

LOW PRESSURE GAS GRILL CONNECTION KIT

The kit is fully assembled with solid brass tee, ball valve and adapters and a 10' high pressure LPG hose with 3/8" female swivel flare fittings on each end.

G-265-120	Complete kit with 10 ft hose
G-265	Kit without hose

TRIDENT MARINE

LPG SUPPLY LINE HOSE

With two solid brass 3/8" female swivel flare fittings and high pressure thermoplastic, LPG hose.

1014-3838-24	2'
1014-3838-60	5'
1014-3838-120	10'
1014-3838-180	15'
1014-3838-240	20'
1014-3838-300	25'
1014-3838-360	30'
1014-3838-420	35'
1014-3838-480	40'

TRIDENT MARINE

LPG POL PIGTAIL

Solid brass male POL cylinder fitting & female POL receptacle and 1/4" ID UL Listed, high pressure, thermoplastic LPG Hose. 20" length.

1014-1402-20

TRIDENT MARINE

LPG PIGTAIL HOSE

Male POL cylinder fitting, 1/4" male inverted flare and high pressure, thermoplastic LPG hose, UL Listed assembly. 20" length.

1014-1401-20

TRIDENT MARINE

LP GAS PIGTAIL HOSE

Quick-closing coupling x 1/4" inverted male flare. 20" length. (For new type 1 cylinder valves.)

1014-1415-20

TRIDENT MARINE

LPG REGULATOR SINGLE STAGE WITH GAUGE

Meets ABYC marine standard with gauge for required LPG System Leak Test. Solid brass: male POL cylinder fitting, street tee and 300 PSI gauge. Die cast zinc body with 3/8 FPT outlet.

1200-1411

TRIDENT MARINE

TWO STAGE LPG AUTO CHANGE OVER REGULATOR

With 2 300psi leak test gauges, wall mounting brackets and 3/8" FPT outlet. 2 stage regulator with both cylinder valves open it automatically changes over to full cylinder when 1st selected cylinder is empty.

1230-1411

TRIDENT MARINE

LPG LEAK TEST ADAPTER WITH GAUGE

Meet ABYC Marine Standard for required LPG System Leak Test by installing this between LPG cylinder and Regulator or Pigtail Hose. Fully assembled and leak tested with solid brass male POL cylinder fitting and female POL receptacle block and 300 PSI Gauge.

1190-1411

TRIDENT MARINE

LPG 1 STAGE REGULATOR GAUGE & BRACKET

Die cast body with 3/8" FPT outlet, 1/4" inverted flare inlet with 300psi leak test gauge. Meets ABYC Marine LPG Standard.

1211-1411

1211-1401 w/ 20" 1014-1401-20 pigtail hose

1211-1402 w/ 20" 1014-1415-20 pigtail hose

TRIDENT MARINE

REGULATOR COVER

Fits all Trident regulators. White PVC.

1231-0000

TRIDENT MARINE

REGULATOR MOUNTING BRACKET

Packaged in sets of 2 with 4 self tapping screws. Stainless steel.

1250-0002

TRIDENT MARINE

MARINE GAS CONTROL SYSTEM

Turns LP Gas ON or OFF from inside galley. Metal panel has fuse, switch and red LED function light which is illuminated when switch, solenoid and gas are on. Includes low pressure solenoid.

1300-7705.3 With 3/8" brass solenoid

1300-7705.4 With 1/4" brass solenoid

TRIDENT MARINE

GAS CONTROL & DETECTION SYSTEM

Turns LP gas ON or OFF from inside galley continuously monitors space(s) for presence of LP gas in up to three locations with additional gas detectors and automatically turns gas off and activates audio and visual alarms if gas is detected at 10% or more of lower explosion limit. Includes detector (with red function light), low pressure solenoid and state of the art surface mount control panel (three alarm zone indicators, green function light, red alarm lights, 95 dB alarm, new mute/test button and 10 foot quick connect cable). The detector is ON and monitoring even when gas control panel is OFF and its alarm horn will sound as long as LP gas is present at 10% lower explosion limit or until the mute button is touched. If gas is detected when the control panel is turned ON, the control switch, green light, solenoid and gas are automatically turned OFF. The red alarm light illuminates to show where the alarm occurred. 12VDC

1300-7760 Kit with panel, detector & 10' cable

1300-7761 Kit with panel, detector, 3/8" solenoid & 10' cable

TRIDENT MARINE

GAS DETECTOR

Marine UL Listed with red function light. Remains ON & monitoring even when gas control panel is OFF. Requires quick connect cable. Can have a total of 3 sensors with purchase of additional sensors & cables.

1300-7720

1300-7721-120 10 foot quick connect cable

1300-7721-240 20 foot quick connect cable

TRIDENT MARINE

12 VDC/LOW PRESSURE SOLENOIDS

These 12V. brass body solenoids connect to regulator outlet and supply hose with reducing adapters. Both shut off automatically in case of power failure. Draw 790M.A. UL Listed.

1300-7706.2 3/8" FPT

1300-7708.2 1/4" FPT

SA-1

SA-1XL

MARINE TECHNOLOGIES INC.

GASOLINE FUME DETECTORS

Easy, snap together assembly. UL listed to Marine Combustible Gas Indicators UL 1110. Alarm trigger 20% or less of LEL. Fumes detected: Gasoline, hydrogen from batteries, propane, alcohol, acetone, methane and other explosive vapours. On/off/test switch for one touch analysis of detector performance. 7-16 VDC, .2 amp.

SA-1 In dash model, fits standard 2-1/8" in dash panel,

SA-1XL Surface mount model, 3-1/4" W x 2-3/4" H x 3/4" D

MARINE TECHNOLOGIES INC.

FUME, FIRE AND FLOOD DETECTOR

Easy, snap together assembly. Marine environment tested for salt water spray, shock, temperature extremes, vibration and corrosion. Fumes detected: Gasoline, hydrogen from batteries, propane, alcohol, acetone, methane and other explosive vapours. Fire alarm trigger: 180° thermal switch. Flood sensor triggers during high bilge water conditions. On/off/test switch for one touch analysis of detector performance. 3-1/4" W x 2-3/4" H x 3/4" D.

SA-10XL Power 7-16 VDC, .2amp

ACCESSORIES FOR SA-1, SA-1XL, SA-10XL

SA-186-SB Remote sensor for monitoring second area
Includes "Y" adapter for easy installation and 20' snap connector cord

SA-186-S Replacement fume sensor only

MARINE TECHNOLOGIES INC.

CARBON MONOXIDE ALARMS

Marine environment tested for salt water spray, cooking fumes, shock, humidity, temperature extremes, vibration and corrosion. Memory scan retains the CO level that activated the alarm. UL listed to 2034-98 for Marine use, effective 6/2/99. Meets ABYC recommended standards. Confirmation circuit reconfirms CO levels before alarming.
8-16 VDC, .6 amp

60-541 Surface mount, 5.5"W x 3"H x 1.3"D

60-542 Flush mount, 6.5"W x 3.5"H x 1.25"D

MARINE TECHNOLOGIES INC.

DUAL PROPANE AND NATURAL GAS DETECTOR

Double check circuit eliminates false alarms caused by a brief exposure to perfumes, hair spray, cleaners, aerosol sprays and other flammable gases. An eight second double check circuit is used to verify a gas leak from a momentary gas exposure. Mute circuit temporarily silences the detector for two minutes. For added safety, the red LED will continue to flash and the alarm will beep every 30 seconds until the gas has cleared. UL listed for use in recreational vehicles.

40-441 Surface mount, 12VDC

ELECTRO SYSTEMS

GS/3 PROPANE DETECTOR

This self-contained detector is designed specifically for propane. The green LED indicates the sensor is on and operating. If a leak is detected the red LED and horn pulse, warning you to shut off the propane supply. 2 year parts & labour guarantee.

Size: 4.32"H x 3.55"W x 1.23"D
Power req.: 12VDC @ 86mA
Sensitivity: <25% of Lower Explosive Level
Alarm output: 85dB

ELEGS-3 Surface mount

ELEGS-3F Flush mount

ELECTRO SYSTEMS

GS/5 PROPANE DETECTOR

This gas detector monitors up to two remote sensors. If there is a leak the display flashes a warning and the audio horn pulses an alarm. As soon as residual fumes drop to a safe level the detector displays the OK symbol. Complete with 1 remote sensor head and cable. 2 year parts & labour guarantee. 0.2 amp 12VDC power consumption.

ELEGS-5 GS/5 surface mount

ELEGS-5F GS/5 flush mount

ELEEC17 Optional second sensor housing w/ 17' cable

ELE813 Replacement sensor
(1 needed to complete ELEEC17)

ELECTRO SYSTEMS

GS/6 PROPANE DETECTOR

This gas detector monitors up to two areas. If there is a leak the display flashes a warning and the audio horn pulses an alarm. The gas supply automatically shuts off - and stays off - until you reset it. Comes with 1 remote sensor head and cable. 2 year parts & labour guarantee.
12VDC power consumption (0.3 amps with solenoid energized)

ELEGS-6 GS/6 surface mount

ELEGS-6F GS/6 flush mount

ELE121 Optional solenoid valve

ELEEC17 Optional second sensor housing w/ 17' cable

ELE813 Replacement sensor
(1 needed to complete ELEEC17)

ELECTRO SYSTEMS

HIGH PRESSURE SOLENOID

ELE121 1/4" rating up to 312psi

ELEGS195 3/8" rating up to 350psi